


Feb.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

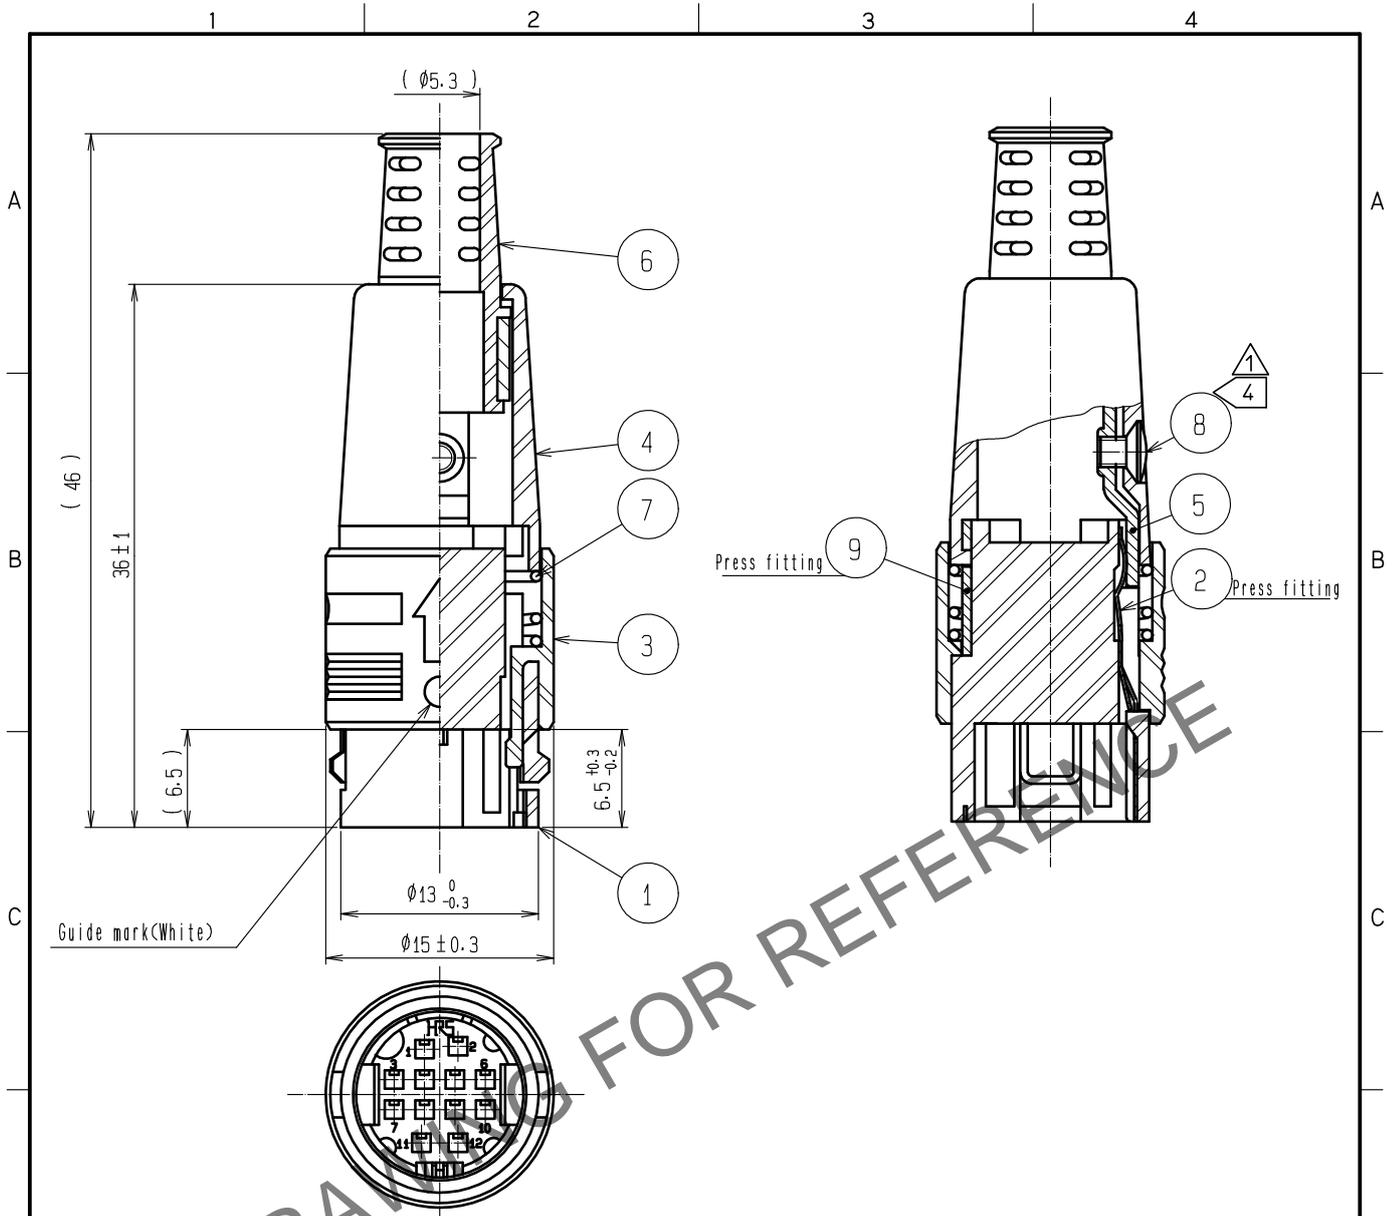

- Notes 1 Applicable crimp contact:
 Contact No. 1,3 to 10 : RP17-PC-222/CL113-0508-0 (Applicable cable size : awg#24 to #28.
 Cable jacket outer diameter shall be ϕ 1.2mm or less.)
 Contact No. 2,11,12 : RP17-PC-212/CL113-0507-7 (Applicable cable size : awg#18 to #22.
 Cable jacket outer diameter shall be ϕ 1.7mm or less.)
 2 Applicable cable crimping tool : RP17-TC-01/CL150-0042-5
 3 Extraction tool : RP6-SC-TP/CL150-0039-0
 ④ The tightening torque of Ref No. ③ : 0.15 to 0.2 N·m.
 To prevent loosening Ref No. ③, use LOCTITE 243, HENKEL JAPAN or equivalent.
 5 Shall be disassembled when delivered.
 6 The cable pull and twisting strength and other characteristics may differ,
 depending on the cable structure, please confirm before the use.

5	Brass				
4	Polycarbonate	(BLACK) UL94V-0	9	Brass	
3	Polycarbonate	(BLACK) UL94V-0	8	Brass	Black chromete treatment (Trivalent chromium) JIS B 1111 M2X0.4X4
2	Stainless steel		7	Steel	Nickel plating
1	Polycarbonate	(BLACK) UL94V-0	6	Polyvinylchloride	(BLACK)
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS

UNITS mm		SCALE 2 : 1	COUNT ④ 2	DESCRIPTION OF REVISIONS DIS-C-00009784	DESIGNED TY. SUZUKI	CHECKED HY. KOBAYASHI	DATE 20220214	
HIROSE ELECTRIC CO., LTD.		APPROVED : MO. SATOH	20060630	DRAWING NO.	EDC-025906-71-71			
		CHECKED : MO. SATOH	20060630	PART NO.	RP17A-13P-12PC(71)			
		DESIGNED : EM. YUMINO	20060630	CODE NO.	CL0113-0551-9-71	④ 1/1		
		DRAWN : MM. ISHII	20060614					